

SPEC. NO.: PS-50966-XXXXX-XXX

REVISION: B

PRODUCT NAME: 2.50mm PITCH BATTERY CONNECTOR

PRODUCT NO: 50966 SERIES, 5300X SERIES ,51998 SERIES

PREPARED: BRAVE DATE: 2011.08.24	CHECKED: SAM DATE: 2011.08.24	APPROVED: JASON DATE: 2011.08.24
---	--	---

TITLE: 2.50MM PITCH BATTERY CONNECTOR

RELEASE DATE: 2011.09.14

REVISION:B

ECN No: 1109243

PAGE: 2 OF 9

1	REVISION HISTORY	3
2	SCOPE	4
3	APPLICABLE DOCUMENTS.....	4
4	REQUIREMENTS	4
5	PERFORMANCE	5
6	INFRARED REFLOW CONDITION	8
7	PRODUCT QUALIFICATION AND TEST SEQUENCE.....	9

Aces P/N: **50966 series**

TITLE: **2.50MM PITCH BATTERY CONNECTOR**

RELEASE DATE: 2011.09.14

REVISION: B

ECN No: 1109243

PAGE: 3 OF 9

1 Revision History

Rev.	ECN #	Revision Description	Prepared	Date
1	ECN-0910214	NEW SPEC	JASON	2009.10.22
O	ECN-1001003	RELEASE	JASON	2009.01.04
A	ECN-1106240	ADD PIN 50964	BRAVE	2010.07.04
B	ECN-1109243	ADD PIN 51998	BRAVE	2011.08.24

TITLE: **2.50MM PITCH BATTERY CONNECTOR**

RELEASE DATE: 2011.09.14

REVISION: B

ECN No: 1109243

PAGE: 4 OF 9

2 SCOPE

This specification covers performance, tests and quality requirements for **2.50mm Pitch Battery Connector**.

3 APPLICABLE DOCUMENTS

EIA-364: ELECTRONICS INDUSTRIES ASSOCIATION

4 REQUIREMENTS

4.1 Design and Construction

- 4.1.1 Product shall be of design, construction and physical dimensions specified on applicable product drawing.
- 4.1.2 All materials conform to R.o.H.S. and the standard depends on TQ-WI-140101.

4.2 Materials and Finish

- 4.2.1 Contact: High performance copper alloy
Finish: Pls refer to the drawing.
- 4.2.2 Housing: Thermoplastic or Thermoplastic High Temp., UL94V-0

4.3 Ratings

- 4.3.1 Voltage: **30 Volts AC (per pin)**
- 4.3.2 Current: **6 Amperes (per pin)**
- 4.3.3 Operating Temperature : **-40°C to +85°C**

TITLE: 2.50MM PITCH BATTERY CONNECTOR

RELEASE DATE: 2011.09.14

REVISION:B

ECN No: 1109243

PAGE: 5 OF 9

5 Performance

5.1. Test Requirements and Procedures Summary

Item	Requirement	Standard
Examination of Product	Product shall meet requirements of applicable product drawing and specification.	Visual, dimensional and functional per applicable quality inspection plan.
ELECTRICAL		
Item	Requirement	Standard
Low Level Contact Resistance	30 m Ω Max.(initial)per contact Δ R 20 m Ω Max. (Final)	Mate connectors, measure by dry circuit, 20mV Max., 100mA Max. (EIA-364-23)
Insulation Resistance	500 M Ω Min.	Unmated connectors, apply 500 V DC between adjacent terminals. (EIA-364-21)
Dielectric Withstanding Voltage	No discharge, flashover or breakdown. Current leakage: 1 mA max.	300 V AC Min. at sea level for 1 minute. Test between adjacent contacts of unmated connectors. (EIA-364-20)
Temperature rise	30°C Max. Change allowed	Mate connector: measure the temperature rise at rated current until temperature stable. The ambient condition is still air at 25°C (EIA-364-70 METHOD 1,CONDITION 1)
MECHANICAL		
Item	Requirement	Standard
Durability	5000 cycles.	The sample should be mounted in the tester and fully mated and unmated the number of cycles specified at the rate of 25.4 \pm 3 mm/min.
Mating /Unmating Forces	Mating Force: 0.9Kgf Max./per pin Unmating Force: 0.03Kgf Min./per pin	Operation Speed : 25.4 \pm 3 mm/minute.. Measure the force required to mate/Unmate connector. (EIA-364-13)

TITLE: 2.50MM PITCH BATTERY CONNECTOR

RELEASE DATE: 2011.09.14

REVISION:B

ECN No: 1109243

PAGE: 6 OF 9

Contact Retention Force	0.5kgf MIN.	Operation Speed : 25.4 ± 3 mm/minute. Measure the contact retention force with tester.
Lock Retention Force	0.35kg/f Min.	Apply axial pull out force at the speed rate of 25.4 ± 3 mm/minute. On the fitting nail assembled in the housing.
Vibration	1 μs Max.	The electrical load condition shall be 100 mA maximum for all contacts. Subject to a simple harmonic motion having amplitude of 0.76mm (1.52mm maximum total excursion) in frequency between the limits of 10 and 55 Hz. The entire frequency range, from 10 to 55 Hz and return to 10 Hz, shall be traversed in approximately 1 minute. This motion shall be applied for 2 hours in each of three mutually perpendicular directions. (EIA-364-28 Condition I)
Shock (Mechanical)	1 μs Max.	Subject mated connectors to 50 G's (peak value) half-sine shock pulses of 11 milliseconds duration. Three shocks in each direction shall be applied along the three mutually perpendicular axes of the test specimen (18 shocks). The electrical load condition shall be 100mA maximum for all contacts. (EIA-364-27, test condition A)

ENVIRONMENTAL

Item	Requirement	Standard
Resistance to Wave Soldering Heat	See Product Qualification and Test Sequence Group 10 (Lead Free)	Solder Temp. : 265±5°C, 10±0.5sec.
Resistance to Reflow Soldering Heat	See Product Qualification and Test Sequence Group 10 (Lead Free)	Pre Heat : 150°C~180°C, 60~120sec. Heat : 230°C Min., 40sec Min. Peak Temp. : 260°C Max, 10sec Max.

TITLE: 2.50MM PITCH BATTERY CONNECTOR

RELEASE DATE: 2011.09.14

REVISION: B

ECN No: 1109243

PAGE: 7 OF 9

Hand Soldering Temperature Resistance	Appearance: No damage	$T \geq 350^{\circ}\text{C}$, 3sec at least.
Thermal Shock	See Product Qualification and Test Sequence Group 4	Mate module and subject to follow condition for 5 cycles. 1 cycles: -55 +0/-3 °C, 30 minutes +85 +3/-0 °C, 30 minutes (EIA-364-32, test condition I)
Humidity	See Product Qualification and Test Sequence Group 4	Mated Connector 40°C, 90~95% RH, 96 hours. (EIA-364-31, Condition A, Method II)
Temperature life	See Product Qualification and Test Sequence Group 5	Subject mated connectors to temperature life at 85°C for 96 hours . (EIA-364-17, Test condition A)
Salt Spray (Only For Gold Plating)	See Product Qualification and Test Sequence Group 6	Subject mated/unmated connectors to 5% salt-solution concentration, 35°C (I) Gold flash for 8 hours (II) Gold plating 5 u" for 96 hours. (EIA-364-26)
Solder ability	Tin plating: Solder able area shall have minimum of 95% solder coverage. Gold plating: Solder able area shall have minimum of 75% solder coverage	And then into solder bath, Temperature at $245 \pm 5^{\circ}\text{C}$, for 4-5 sec . (EIA-364-52)

Note. Flowing Mixed Gas shall be conduct by customer request.

TITLE: 2.50MM PITCH BATTERY CONNECTOR

RELEASE DATE: 2011.09.14


REVISION:B

ECN No: 1109243

PAGE: 8 OF 9

6 INFRARED REFLOW CONDITION

6.1. Lead-free Process

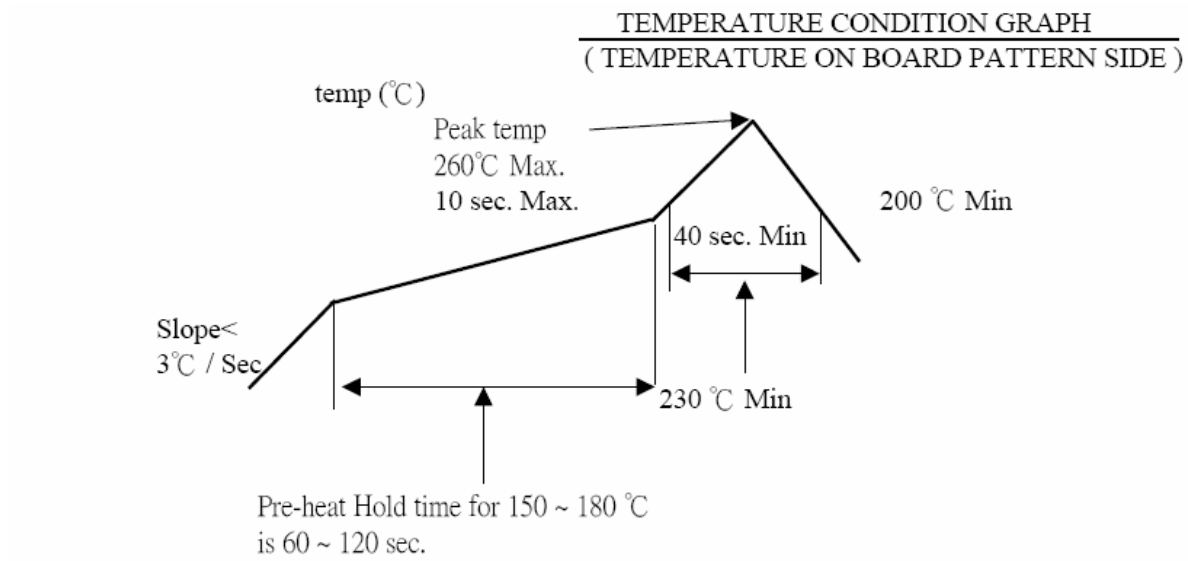

Aces P/N: **50966 series**

TITLE: **2.50MM PITCH BATTERY CONNECTOR**

RELEASE DATE: 2011.09.14

REVISION:B

ECN No: 1109243

PAGE: 9 OF 9

7 PRODUCT QUALIFICATION AND TEST SEQUENCE

Test or Examination	Test Group										
	1	2	3	4	5	6	7	8	9	10	11
	Test Sequence										
Examination of Product	1,3			1,7	1,6	1,4			1	1,4	1.3
Low Level Contact Resistance		1,5	1,4	2,10	2,9	2,5				2,5	
Insulation Resistance				3,9	3,8						
Dielectric Withstanding Voltage				4,8	4,7						
Temperature Rise	2										
Mating / Unmating Forces		2,4									
Contact Retention Force								1			
Durability		3									
Vibration			2								
Shock(Mechanical)			3								
Resistance to Soldering Heat										3	
Thermal Shock				5							
Humidity				6							
Temperature Life					5						
Salt Spray(Only For Gold Plating)						3					
Solder ability							1				
Lock Retention Force									2		
Hand Soldering Temperature Resistance											2
Sample Size	2	4	4	4	4	4	2	4	4	4	4